

IMPROVED HIGH FREQUENCY DISCRIMINATION: A NEW APPROACH TO CORRECT FOR REGIONAL SOURCE SCALING VARIATIONS (POSTPRINT)

Annual Report 2

Kevin M. Mayeda, et al.

**Weston Geophysical Corporation
181 Bedford St., Suite 1
Lexington, MA 02420**

20 March 2012

Technical Paper

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.



**AIR FORCE RESEARCH LABORATORY
Space Vehicles Directorate
3550 Aberdeen Ave SE
AIR FORCE MATERIEL COMMAND
KIRTLAND AIR FORCE BASE, NM 87117-5776**

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing this collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.				
1. REPORT DATE (DD-MM-YYYY) 20-03-2012		2. REPORT TYPE Technical Paper		3. DATES COVERED (From - To) 01 Sep 2010 to 19 Mar 2012
4. TITLE AND SUBTITLE IMPROVED HIGH FREQUENCY DISCRIMINATION: A NEW APPROACH TO CORRECT FOR REGIONAL SOURCE SCALING VARIATIONS (POSTPRINT) Annual Report 2		5a. CONTRACT NUMBER FA8718-09-C-0014		
		5b. GRANT NUMBER		
		5c. PROGRAM ELEMENT NUMBER 62601F		
6. AUTHOR(S) Kevin M. Mayeda ¹ , William R. Walter ² , Rengin M. Gök ² , and Luca Malagnini ³		5d. PROJECT NUMBER 1010		
		5e. TASK NUMBER PPM00004805		
		5f. WORK UNIT NUMBER EF004243		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Weston Geophysical Corporation 181 Bedford St., Suite 1 Lexington, MA 02420		8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) Air Force Research Laboratory Space Vehicles Directorate 3550 Aberdeen Ave SE Kirtland AFB, NM 87117-5776		10. SPONSOR/MONITOR'S ACRONYM(S) AFRL/RVBYE		
		11. SPONSOR/MONITOR'S REPORT NUMBER(S) AFRL-RV-PS-TP-2012-0044		
12. DISTRIBUTION / AVAILABILITY STATEMENT Approved for public release; distribution is unlimited. (LA-UR-11-04823).				
13. SUPPLEMENTARY NOTES Published in The Proceedings of the 2011 Monitoring Research Review – Ground-Based Nuclear Explosion Monitoring Technologies, 13 – 15 September 2011, Tucson, AZ, Volume I, pp 495-502. Government Purpose Rights. Weston Geophysical Corporation ¹ , Lawrence Livermore National Laboratory ² , and Istituto Nazionale di Geofisica e Vulcanologia ³				
14. ABSTRACT The Magnitude and Distance Amplitude Correction (MDAC) methodology of corrects ratios of regional phase amplitudes for source, path, and site effects and has proven effective for event identification. The MDAC formulation includes a term that describes the earthquake source scaling as the apparent stress variation with magnitude. In almost all regions there is evidence for non-self similar source scaling. The behavior of earthquake source scaling has been the topic of significant debate in the earthquake source community mainly because current methods require substantial path, site, and source radiation pattern corrections that ultimately yield large variance of the apparent stress. A new, state-of-the-art methodology, the coda ratio technique, provides unprecedented estimates for corner frequency and apparent stress drop, roughly 3 times less variance than conventional methods using a minimal number of stations and events. Within broad regions it is likely that apparent stress varies with location due to lateral variations in regional stress field, rheology, and degree of tectonic activity. Currently MDAC assumes a single linear apparent stress scaling with moment for a given region, but if there is <i>a priori</i> information on lateral variations in apparent stress, then this can be used to lower the amplitude ratio scatter and increase the discrimination capability. The coda ratio methodology has been applied to a variety of tectonic regions and clear distinctions between each of them have been found.				
15. SUBJECT TERMS Seismic source scaling, Coda, Spectral ratios				
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Unlimited	18. NUMBER OF PAGES 12
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified		
				19a. NAME OF RESPONSIBLE PERSON Robert J. Raistrick
				19b. TELEPHONE NUMBER (include area code)

**IMPROVED HIGH FREQUENCY DISCRIMINATION: A NEW APPROACH TO CORRECT FOR
REGIONAL SOURCE SCALING VARIATIONS**

Kevin M. Mayeda¹, William R. Walter², Rengin M. Gök², and Luca Malagnini³

Weston Geophysical Corporation¹, Lawrence Livermore National Laboratory², and
Istituto Nazionale di Geofisica e Vulcanologia³

Sponsored by the Air Force Research Laboratory

Award No. FA8718-09C-0014

Proposal No. BAA09-74

ABSTRACT

The Magnitude and Distance Amplitude Correction (MDAC) methodology of Walter and Taylor (2001) corrects ratios of regional phase amplitudes for source, path, and site effects and has proven effective for event identification. The MDAC formulation includes a term that describes the earthquake source scaling as the apparent stress variation with magnitude. In almost all regions we find evidence for non-self similar source scaling. The behavior of earthquake source scaling has been the topic of significant debate in the earthquake source community mainly because current methods require substantial path, site, and source radiation pattern corrections that ultimately yield large variance of the apparent stress. A new, state-of-the-art methodology, the coda ratio technique, was developed by Mayeda et al. (2007) and provides unprecedented estimates for corner frequency and apparent stress drop, roughly 3 times less variance than conventional methods using a minimal number of stations and events. Within broad regions it is likely that apparent stress varies with location due to lateral variations in regional stress field, rheology, and degree of tectonic activity. Currently MDAC assumes a single linear apparent stress scaling with moment for a given region, but if we have *a priori* information on lateral variations in apparent stress, then we can use this to lower the amplitude ratio scatter and increase the discrimination capability. The coda ratio methodology has been applied to a variety of tectonic regions and we find clear distinctions between each of them. In this paper, we compare and contrast our findings for a variety of earthquake sequences using the new methodology.

OBJECTIVES

Conventional direct wave methods of estimating apparent and static stress drop have significant errors, so large in fact that the earthquake source community is divided roughly 50-50 on whether or not self-similarity even holds, a fundamental assumption in many earthquake source models that have been used for roughly 4 decades (i.e., Aki, 1967, Brune, 1970). One such method involves frequency-dependent path, site, and radiation pattern corrections to get at the source spectra. More often than not, these approaches result in corrections that are so large, the resulting estimates on radiated energy and corner frequency are questionable (see reviews by Abercrombie et al., 2004; Ide and Beroza, 2001). One attempt to alleviate some of the problems is to take source ratios of closely spaced events of different magnitude. These can be either a time-domain deconvolution to extract the source-time function (e.g., Hough, 1997) or source spectral ratios (e.g., Izutani and Kanamori, 2001). Figure 1 shows a typical *S*-wave source ratio result from Izutani (2005) for the 2004 M_w 6.7 Niigata, Japan earthquake and selected co-located aftershocks. In spite of a plethora of seismic stations that surround the source region, the scatter on the ratio is huge and estimating corner frequency and apparent stress will have large errors.

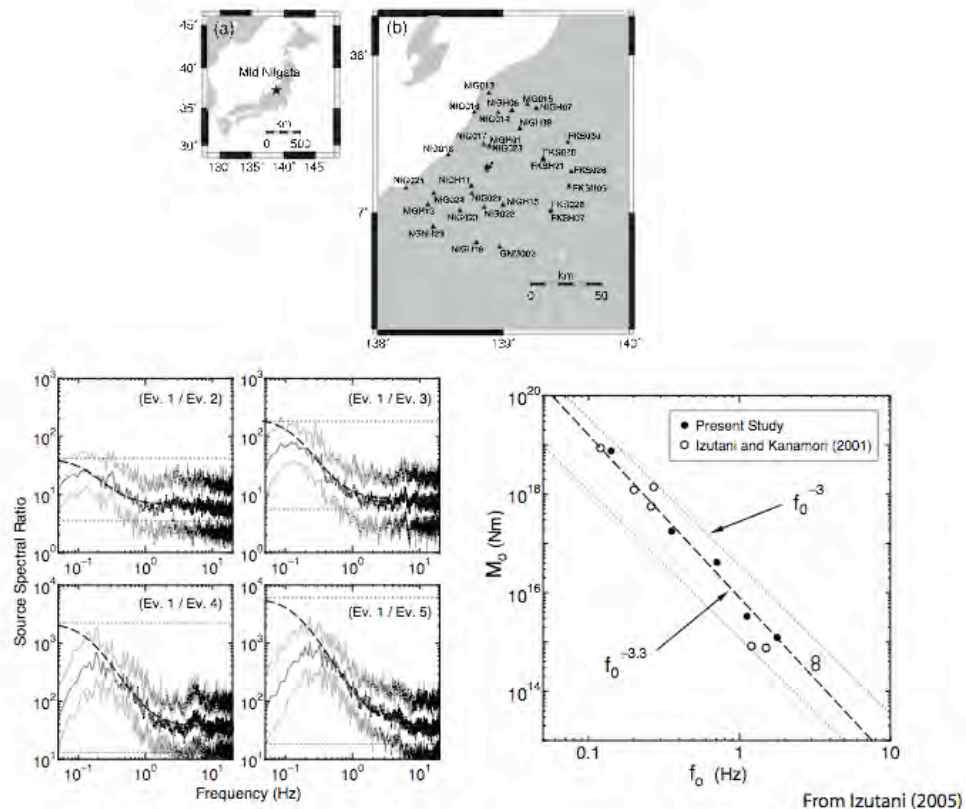


Figure 1. From Izutani (2005) showing direct *S*-wave spectral ratios (lower left) for the 2004 Niigata earthquake in Japan (Ev. 1) relative to four other smaller aftershocks (Ev. 2,3,4,5). Dashed line shows average ratio and dark lines represent $\pm 1 \sigma$ from the stations shown in above map. Moment versus corner frequency exhibits non-constant scaling ($f^{-3.3}$) however no error estimates are shown, but are presumably large.

In addition to seismic hazard prediction and fundamental research on faulting dynamics, an *a priori* knowledge of apparent stress drop can have a profound influence on high-frequency seismic discrimination. The Magnitude and MDAC methodology of Walter and Taylor (2001) removes source, path, and site effects from regional phase amplitudes ratios used for regional seismic discrimination (Figure 2).

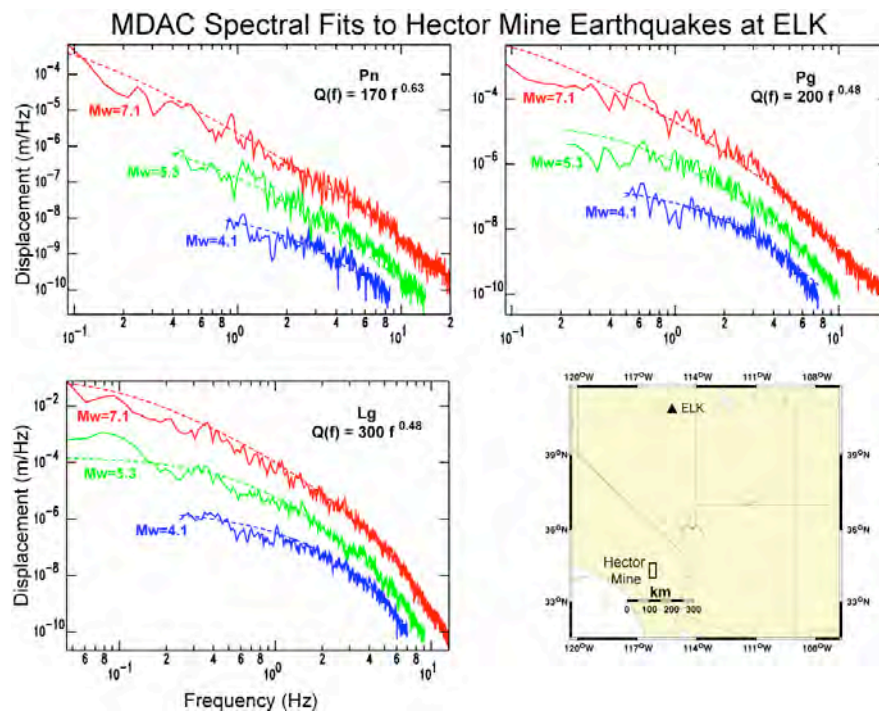


Figure 2. Example of MDAC fits (dashed lines) to observed regional phase amplitude spectra (solid lines) at station ELK for three different size earthquakes in the Hector Mine sequence. MDAC uses an earthquake source spectral model along with path and site corrections to predict amplitudes. In the example shown, part of the path effect is a power law attenuation model that is different for each regional phase type. The MDAC predicted amplitudes are removed from the observed amplitudes leaving residuals that are corrected for source, path and site effects, and ready for use as discriminants, such as in high frequency P/S MDAC residual ratios.

MDAC works by correcting observed amplitudes at each frequency by subtracting the predicted earthquake amplitudes based on the distance and magnitude of the source. This requires an independent estimate of the seismic moment, which is usually obtained from regional coda envelopes. Implicit in the MDAC formulation is a term that describes the earthquake source spectra in terms of its apparent stress (e.g., Wyss, 1970). For a given region we usually use either a fixed average apparent stress, or a linear apparent stress relation that increases with seismic moment. We search for the choice that best reduces the earthquake scatter. For example in Figure 3 in the Korea region we use an apparent stress that increases with seismic moment. Despite allowing for this scaling there remains significant scatter in the earthquake population. One source of this scatter may be spatial variations in the apparent stress related to changes in the geology, tectonics and regional stress field.

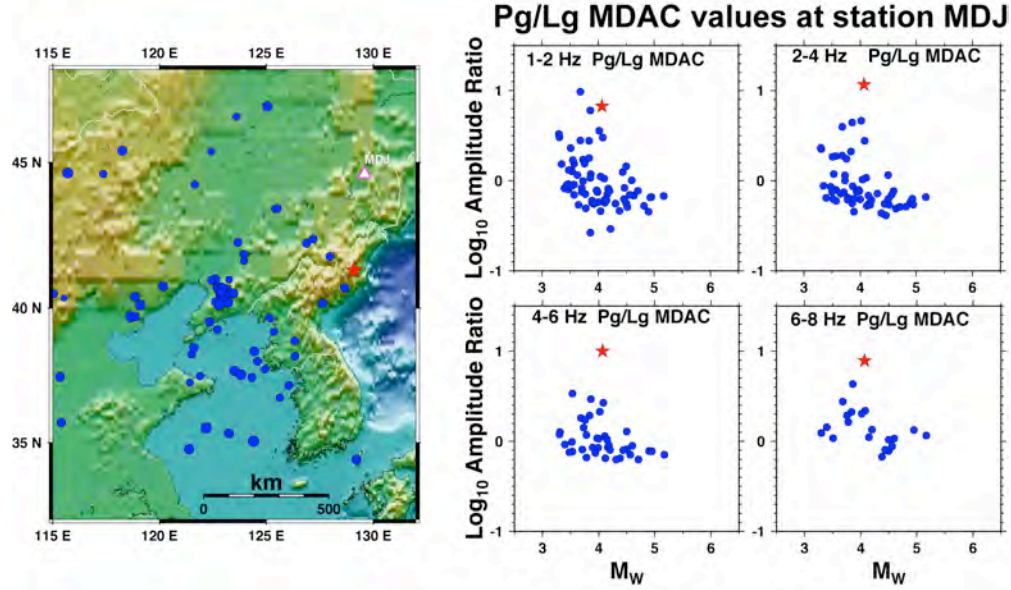


Figure 3. Example of local and regional phase ratios from MDAC for the Yellow Sea/Korean Peninsula for earthquakes (blue circles) and explosions (red star) at station MDJ. Notice the earthquake scatter in all the high frequency discriminants is significant.

To date, in regions of monitoring interest, the apparent stress scaling has been obtained usually through a grid-search or by geophysical analogy (see Equation 3). What is found in almost all regions is that apparent stress appears to increase with magnitude, indicating a non-self similar source scaling. The estimation of earthquake source scaling in general, has been the topic of large debate in the earthquake source community mainly because current methods require substantial path, site, and source radiation pattern corrections that ultimately yield large variance in apparent stress. A new, state-of-the-art methodology has been developed by Mayeda et al. (2007) which provides unprecedented estimates in static and apparent stress drop, roughly 3 times less variance than conventional methods using a minimal number of stations and events. For the broad area, there is every reason to believe that lateral variations in source scaling exist due to lateral variations in regional stress field, rheology, and degree of tectonic activity.

Methodology:

Assuming the simple single corner frequency source model (Aki, 1967; Brune, 1970) used in MDAC, the ratio of the moment-rate functions for two events (1 and 2) is given by,

$$\frac{\dot{M}_1(\omega)}{\dot{M}_2(\omega)} = \frac{M_{0_1} \left[1 + \left(\frac{\omega}{\omega_{c_2}} \right)^2 \right]^{p/2}}{M_{0_2} \left[1 + \left(\frac{\omega}{\omega_{c_1}} \right)^2 \right]^{p/2}} \quad (1)$$

where M_0 is the seismic moment and ω_c is the angular corner frequency ($2\pi f_c$) and p is the high frequency decay rate. At the low frequency limit the source ratio shown in Equation 1 is proportional to the ratio of the seismic moments $[M_{0_1}/M_{0_2}]$, whereas at the high frequency limit, Equation 1 is asymptotic to $[M_{0_1}/M_{0_2}]^{\left(-\frac{p}{3}\right)}$ under self-similarity. If we follow the usual Brune (1970) omega-square model and set $p=2$, the exponent of the

high-frequency ratio becomes 1/3. However, it has been proposed by Kanamori and Rivera (2004) that the scaling between moment and corner frequency could take on the form,

$$M_o \sim \omega_c^{-(3+\epsilon)} \quad (2)$$

where ϵ represents the deviation from self-similarity and is usually thought to be a small positive number. For example, Walter et al. (2006) found ϵ to be close to 0.5 for the Hector Mine mainshock and its aftershocks using independent spectral methods. For the current study we use the source spectrum portion of the MDAC methodology of Walter and Taylor (2001), which allows for the variation of the corner frequency that does not have to be self-similar. For example,

$$\omega_c = \left(\frac{k\sigma_a}{M_o} \right)^{1/3} \quad \text{and} \quad \sigma_a = \sigma'_a \left(\frac{M_o}{M'_o} \right)^\psi \quad \text{and} \quad \psi = \frac{\epsilon}{\epsilon + 3} \quad (3)$$

where σ_a is the apparent stress (Wyss, 1970), σ'_a and M'_o are the apparent stress and seismic moment of the reference event, and ψ is a scaling parameter. For constant apparent stress, $\psi = 0$ and $\epsilon = 0$, however, Mayeda and Walter (1996) found $\psi=0.25$ for moderate to large earthquakes in the western United States. By using the corner frequency defined in (3) into Equation 1, we can apply a grid search to find the parameters that best fit the spectral ratio data.

As discussed earlier, the during previous year we processed the following sequences for source scaling as part of our plan to study as many varied geophysical regions as possible: Parkfield, CA; San Simeon, Ca; Wells, NV.

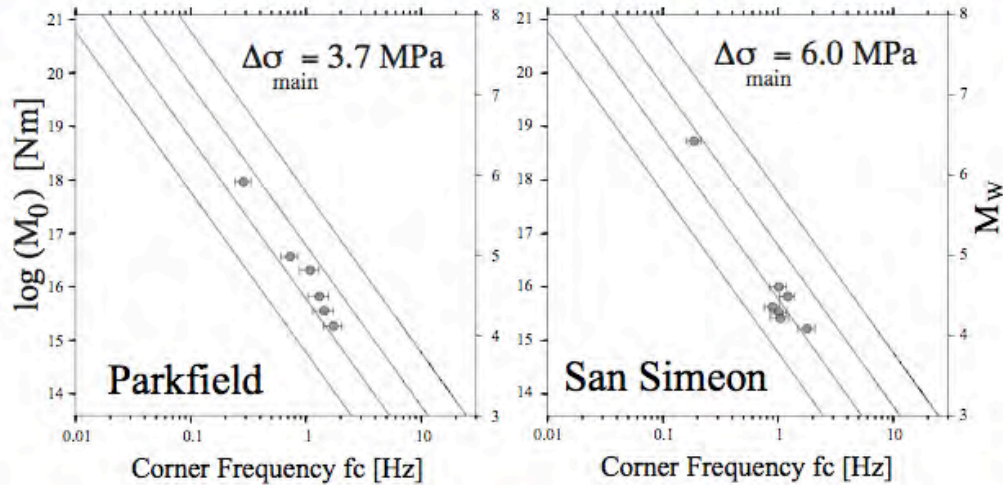


Figure 4. Corner frequency vs moment scaling is shown for two sequences in southern California using the coda ratio methodology. The first is the Mw 6.0 2004 Parkfield earthquake and the Mw 6.5 San Simeon earthquake. We see that the Parkfield sequence obeys similarity unlike the San Simeon sequence.

Our results for Parkfield are in some ways a relief since up to this point, virtually all sequences that we have studied were non-self similar. We were wondering if somehow the methodology was biased but this sequence shows that this is not the case. Finally, we completed calibration of the Mw 6.0 2008 Wells, Nevada earthquake and show the results in Figure 5 from Mayeda et al., (2010).

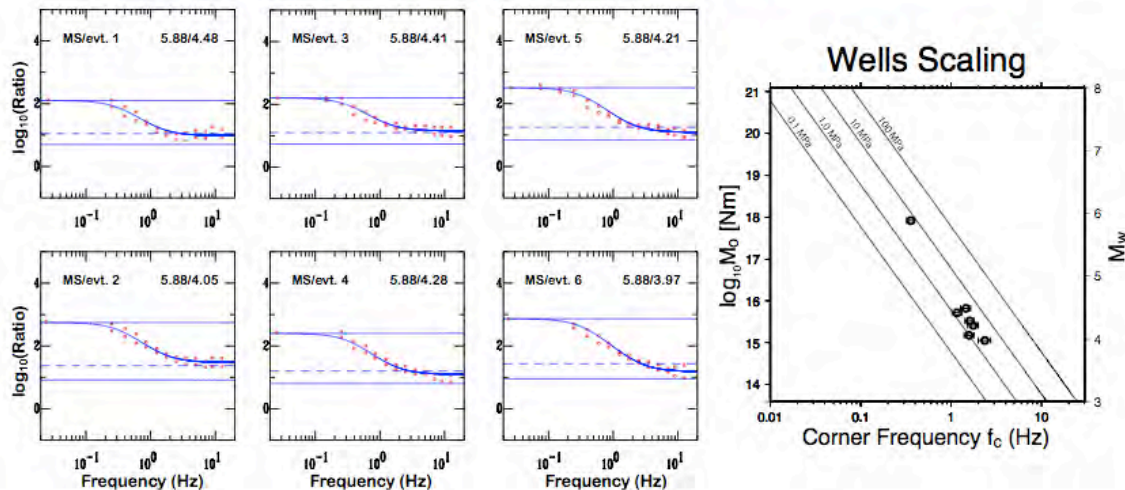


Figure 5. Spectral ratio fits where top horizontal solid line represents the theoretical low-frequency limit based upon the two events' moment estimates, the bottom solid line represents the theoretical high-frequency limit assuming self-similarity, and dashed line is when $p=1.5$ in Equation 1. Estimates of f_c and ± 1 standard deviation error bars for the Wells mainshock and 6 aftershocks. Lines represent constant $\Delta\sigma_B$ in MPa.

RESEARCH ACCOMPLISHED

This past year we resumed our study on source scaling and considered the April 4, 2010, Baja M_w 7.2 strike-slip event which was well recorded by broadband stations throughout southern California. This sequence along with others in southern California was the focus of a recent SSA talk on April 14, 2011. This sequence was an interesting test because a number of the aftershocks were of mixed focal mechanisms, namely normal and strike-slip. As found with other sequences, the high frequency spectral levels do not reach the theoretically predicted level if the sources obey self-similarity.

Baja California

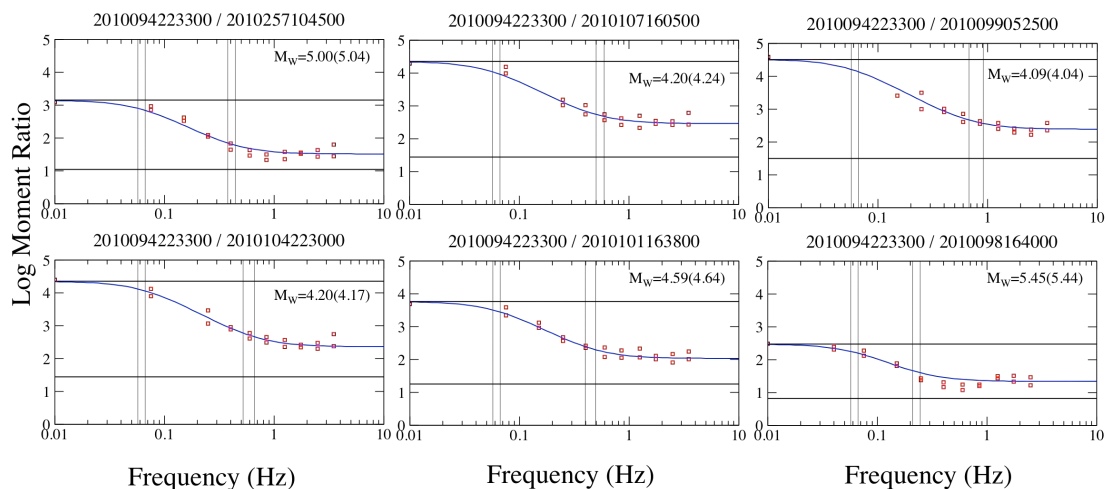


Figure 6. Baja spectral ratio fits where top horizontal solid line represents the theoretical low-frequency limit based upon the two events' moment estimates, the bottom solid line represents the theoretical high-frequency limit assuming self-similarity, and dashed line is when $p=1.5$ in Equation 1. Estimates of f_c and ± 1 standard deviation error bars for the Baja mainshock and 6 aftershocks. Lines represent constant $\Delta\sigma_B$ in MPa.

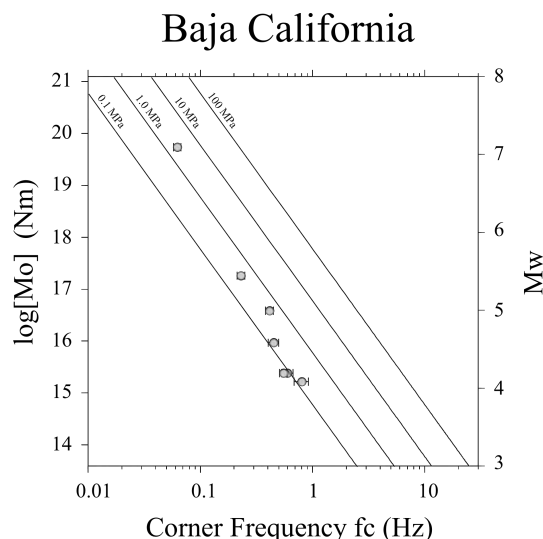


Figure 7. Corner frequency estimates exhibit very low variance for this sequence and also shows a strong decrease in Brune stress drop with decreasing magnitude.

CONCLUSIONS AND RECOMENDATIONS:

We are now back on track and have collected waveform data from the Christchurch, New Zealand sequence and will start comparing sequences based upon their faulting mechanisms. Other sequences that we will consider are smaller clusters in the middle east region. Again, we highlight the advantages of the methodology below:

- The coda is not sensitive to lateral variations in structure and effectively homogenizes its energy over a broad area
- Directivity and source radiation pattern will not affect the coda envelope amplitude measurement due to azimuthal averaging
- Unlike direct wave methods that require large amounts of data to average, the coda method can use a minimal number of events and stations.
- The methodology does not require path and site corrections.
- Large amounts of data have already been archived by LLNL and Weston in the regions of monitoring interest and coda envelope shape and velocity parameters have already been derived for all the regions.

REFERENCES

- Abercrombie, R. E., and J. R. Rice (2005). Can observations of earthquake scaling constrain slip weakening?, *Geophys. J. Int.* 162: 406–424.
- Aki, K. (1967). Scaling law of seismic spectrum. *J. Geophys. Res.* 72: 1217–1231.
- Brune, J. N. (1970), Tectonic stress and spectra of seismic shear waves from earthquakes, *J. Geophys. Res.* 75: 4997–5009.
- Hough, S.E. (1997). Empirical Green's function analysis: Taking the next step, *J. Geophys. Res.* 102: 5369–5384.

- Ide, S. and G. C. Beroza (2001). Does apparent stress vary with earthquake size?, *Geophys. Res. Lett.* 28: 3349–3352.
- Izutani Y. and Kanamori, H. (2001). Scale-dependence of seismic energy-to-moment ratio for strike-slip earthquakes in Japan, *Geophys. Res. Lett.* 28: (20), 4007–4010.
- Izutani, Y. (2005). Radiated energy from the mid Niigata, Japan, earthquake of October 23, 2004 and its aftershocks, *Geophys. Res. Lett.* 32: L21313, doi:10.1029/2005GL024116.
- Kanamori H. and L. Rivera (2004). Static and dynamic scaling relations for earthquake and their implications for rupture speed and stress drop, *Bull. Seismol. Soc. Am.* 94: 314–319.
- Mayeda, K., Hofstetter A., O'Boyle J. L., and W. R. Walter (2003). Stable and transportable regional magnitudes based on coda-derived moment-rate spectra. *Bull. Seismol. Soc. Am.* 93: 224–239.
- Mayeda, K., L. Malagnini, W. R. Walter (2007). A new spectral ratio method using narrow band coda envelopes: Evidence for non-self-similarity in the Hector Mine sequence, *Geophys. Res. Lett.*, doi:10.1029/2007GL030041, 2007.
- Mayeda, K. and L. Malagnini (2010). Source radiation invariant property of local and near-regional shear-wave coda: Application to source scaling for the Mw 5.9 Wells, Nevada sequence, *Geophys. Res. Lett.* 37, L07306, doi:10.1029/2009GL042148.
- Walter, W. R. and J. N. Brune (1993). Spectra of seismic radiation from a tensile crack, *J. Geophys. Res.* 98: 4449–4459.
- Walter, W. R. and S. R. Taylor (2001). A revised magnitude and distance amplitude correction (MDAC2) procedure for regional seismic discriminants: theory and testing at NTS, Lawrence Livermore National Laboratory Report, UCRL-ID-146882, <http://www.llnl.gov/tid/lof/documents/pdf/240563.pdf>
- Wyss, M. (1970). Stress estimates of South American shallow and deep earthquakes, *J. Geophys. Res.* 75: 1529–1544.

DISTRIBUTION LIST

DTIC/OCP

8725 John J. Kingman Rd, Suite 0944

Ft Belvoir, VA 22060-6218

1 cy

AFRL/RVIL

Kirtland AFB, NM 87117-5776

2 cys

Official Record Copy

AFRL/RVBYE/Robert Raistrick

1 cy

This page intentionally left blank.